
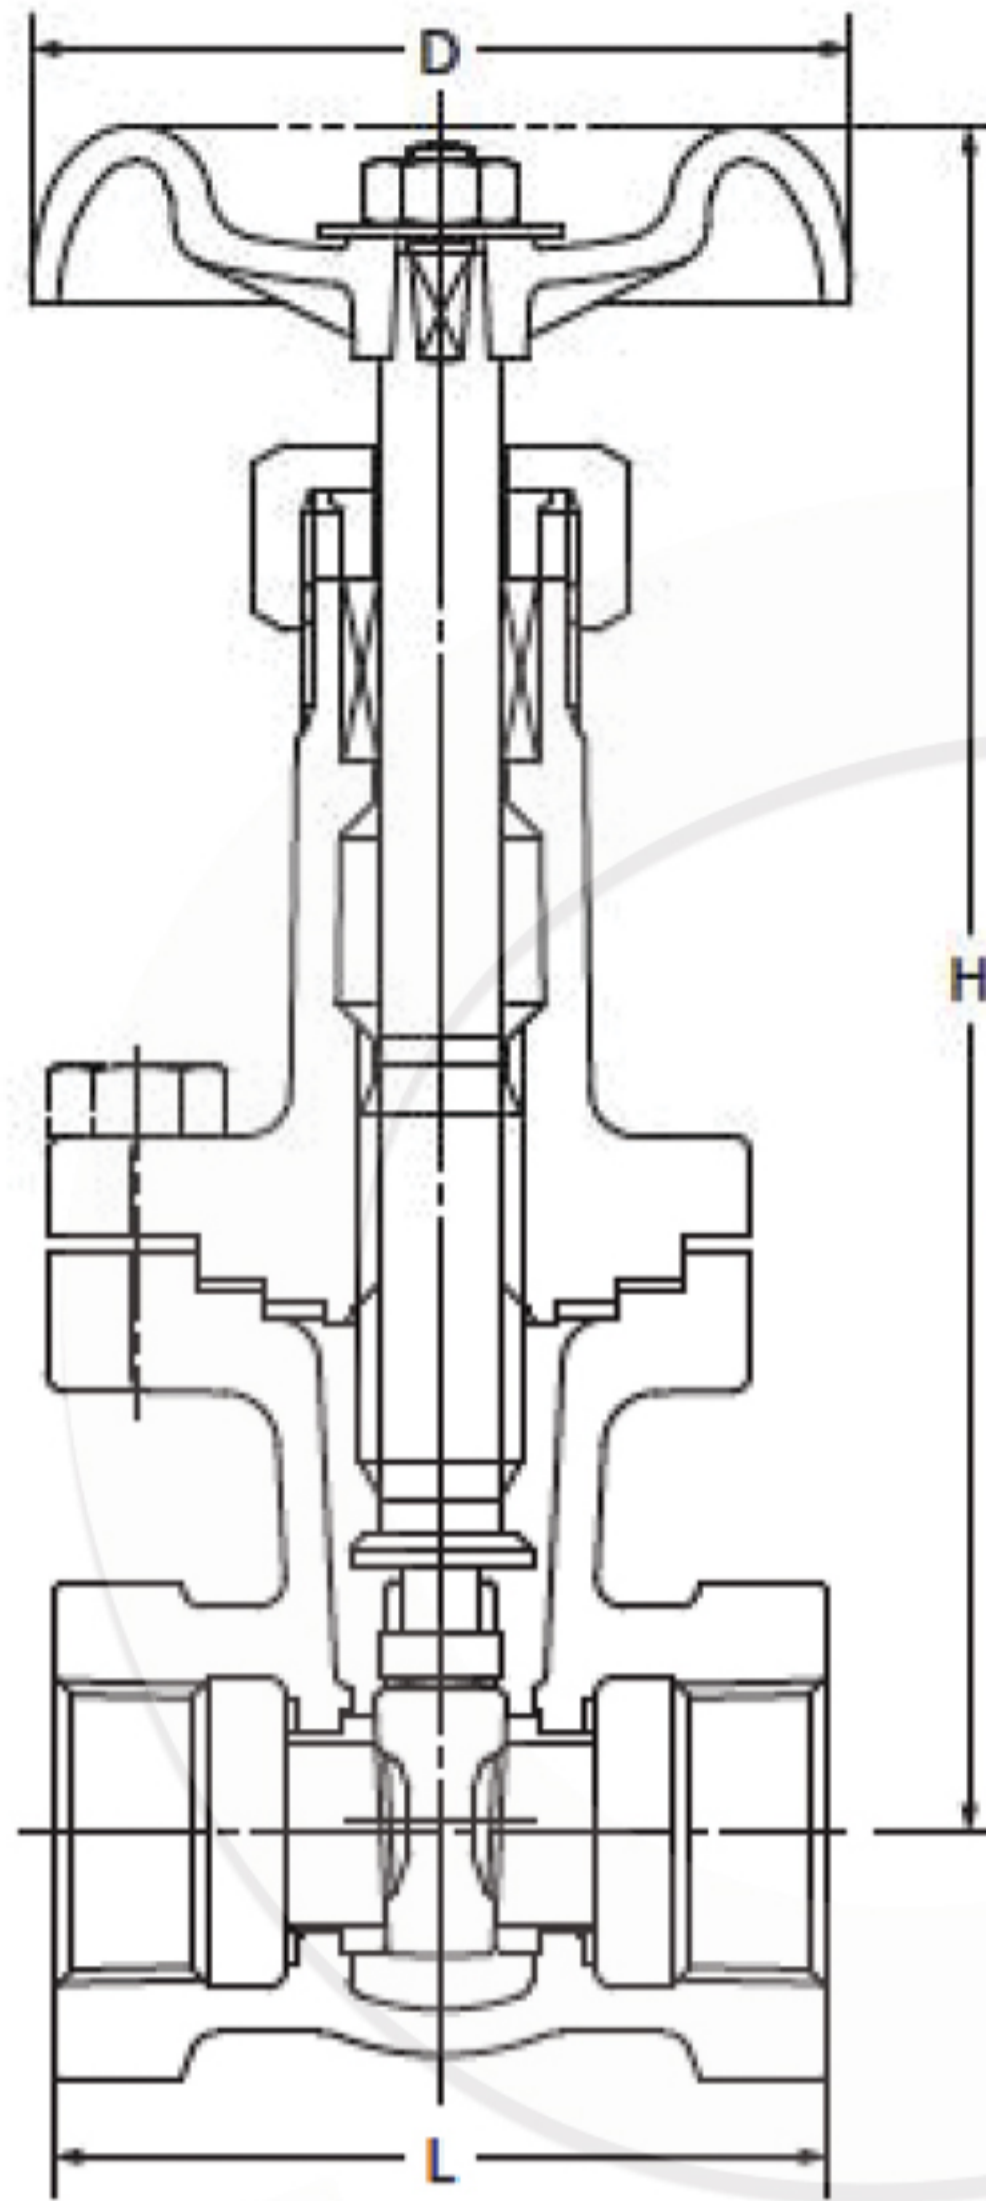


20K Gate Valve

20SLS
B.B.I.S.

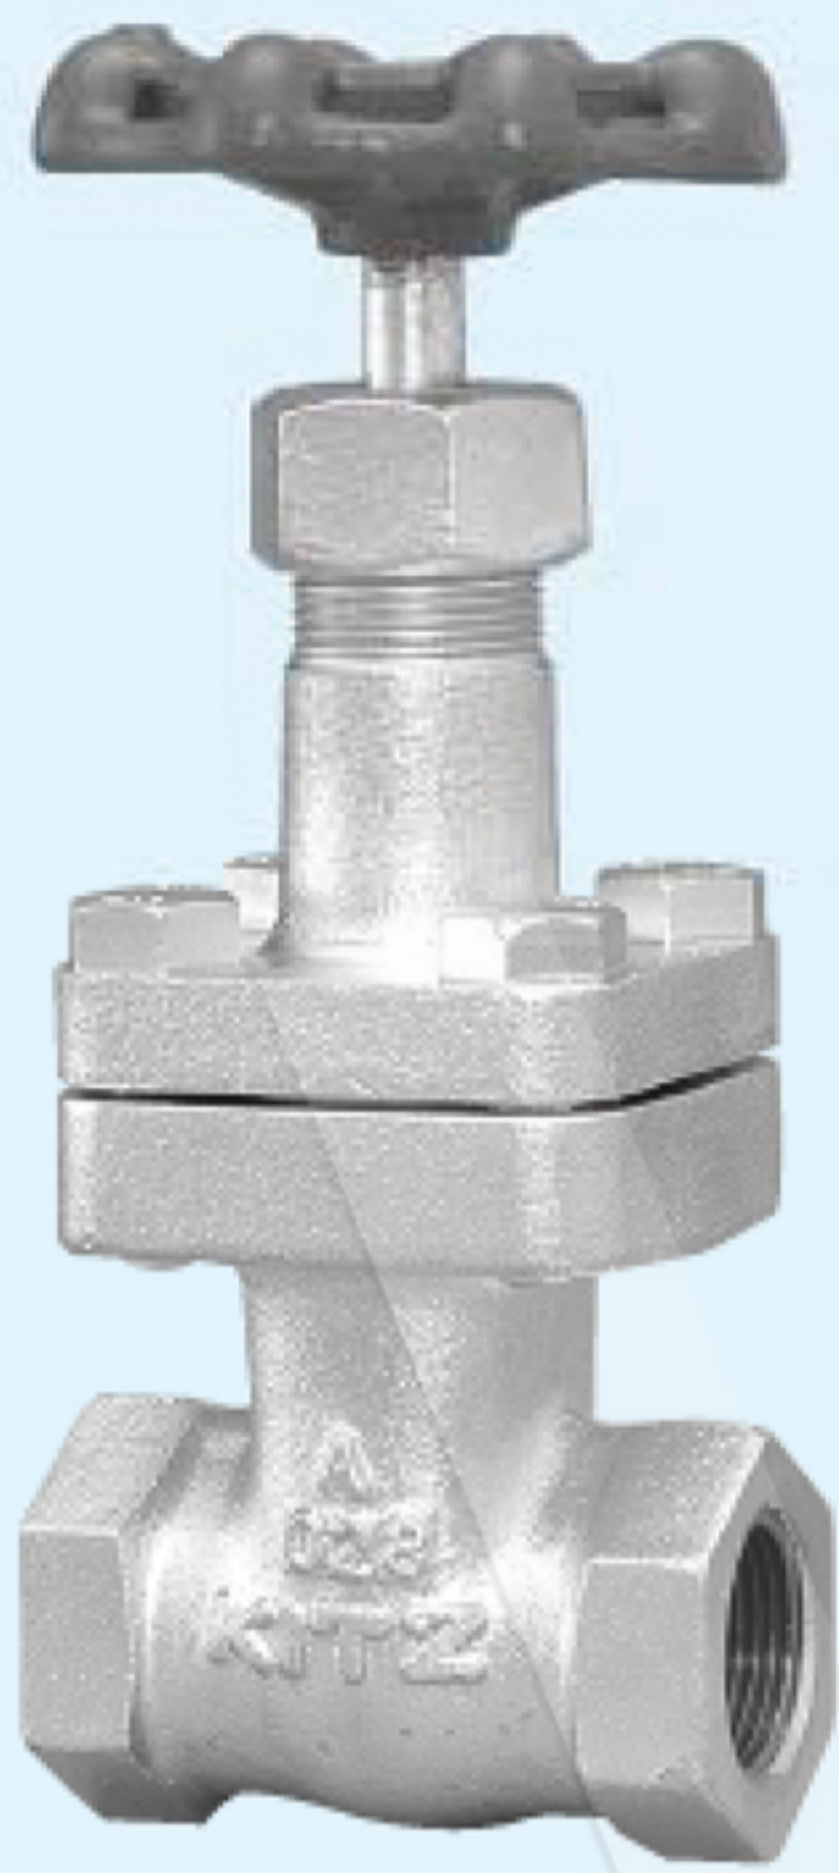

End to end : JV 4-4
End connection : JIS B 0203

120°C Static water..... 2.8MPa
220°C Steam, air, gas, oil..... 2.5MPa
300°C Steam, air, gas, oil..... 2.3MPa
350°C Steam, air, gas, oil..... 2.0MPa

● Use for lubricating or hydraulic oil is acceptable.

Materials

Parts	JIS material
Body	FCD-5
Bonnet	FCD-5
Stem	SUS420J2
Disc	SCS1
Gland	SUS420J2 (1½" & 2": SUS403)
Gland packing	Non-asbestos Packing
Handwheel	FCD450-10
Gasket	Non-asbestos Sheet
Body seat ring	SUS403
Name plate	A1050P

Dimensions

Size	mm						
	mm	15	20	25	32	40	50
	inch	½	¾	1	1¼	1½	2
L		70	75	85	95	105	115
H (open)		175	177	214	241	277	301
D		90	90	100	115	135	135