


20K Gate Valve

20SLB
B.B.I.S.
RF-flanged

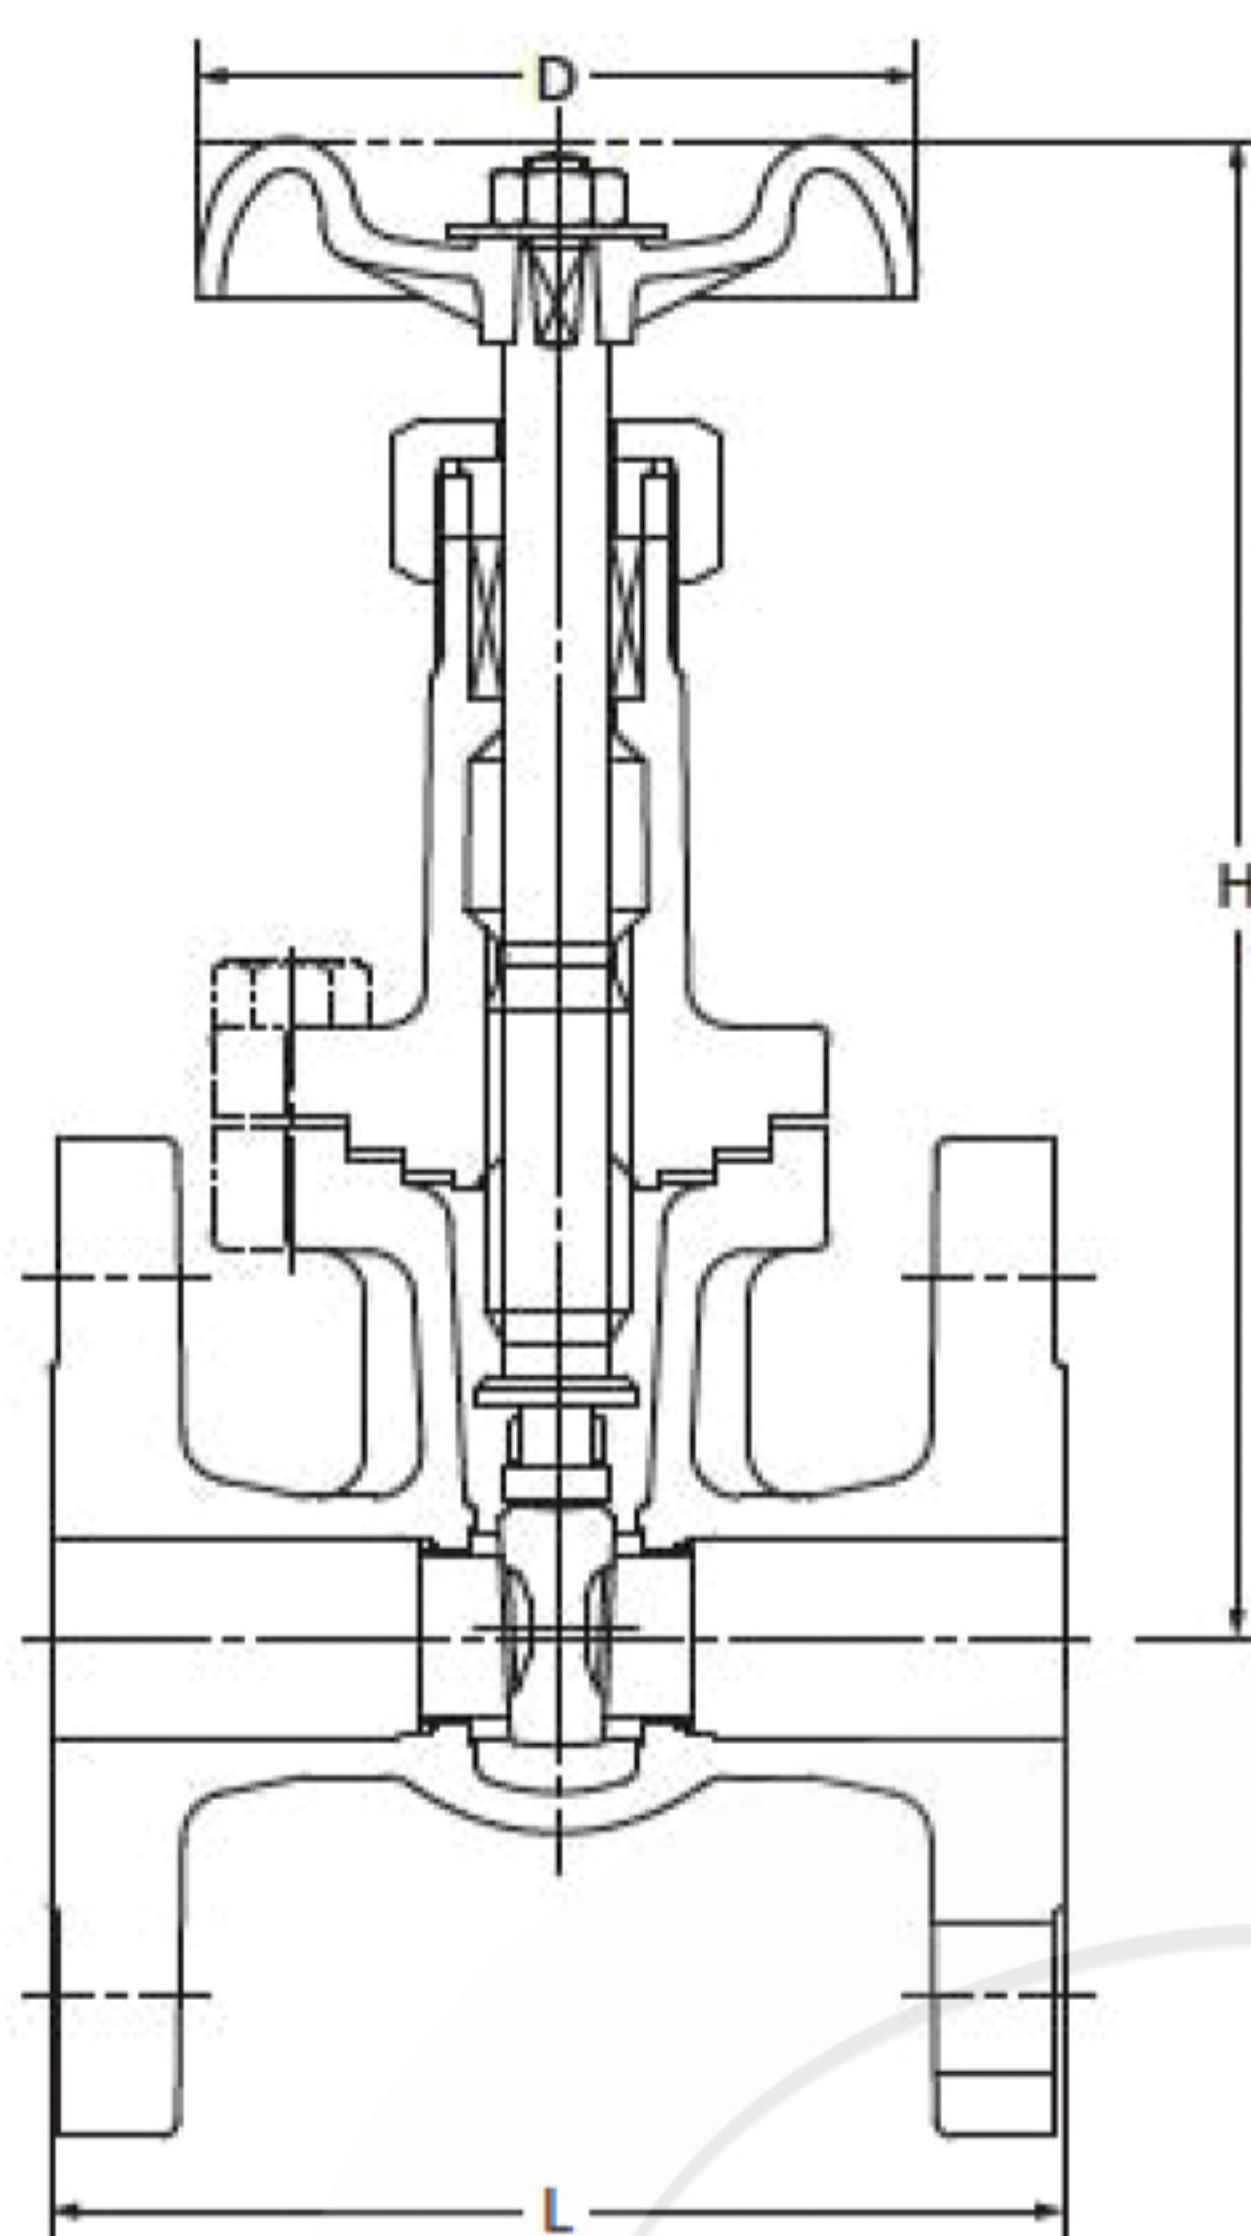

Face to face : JIS B 2002 JV 4-4
End connection : JIS B 2239 20K

120°C Static water..... 2.8MPa
220°C Steam, air, gas, oil..... 2.5MPa
300°C Steam, air, gas, oil..... 2.3MPa
350°C Steam, air, gas, oil..... 2.0MPa

● Use for lubricating or hydraulic oil is acceptable.

Materials

Parts	JIS material
Body	FCD-5
Bonnet	FCD-5
Stem	SUS420J2
Disc	SCS1
Body seat ring	SUS403
Gland	SUS420J2 (40 : SUS403)
Gland packing	Non-asbestos Packing
Handwheel	FCD450-10
Wheel nut	SS400
Bonnet bolt	Carbon Steel
Gasket	Non-asbestos Sheet
Name plate	A1050P

Dimensions

Size	mm inch	15 1/2	20 3/4	25 1	32 1 1/4	40 1 1/2
L		108	117	127	140	165
H (open)		175	177	214	241	277
D		90	90	100	115	135

NOTE : For flange dimensions, refer to Page 44.