


# 20K Lift Check Valve

**20SNB**  
U.B.  
RF-flanged

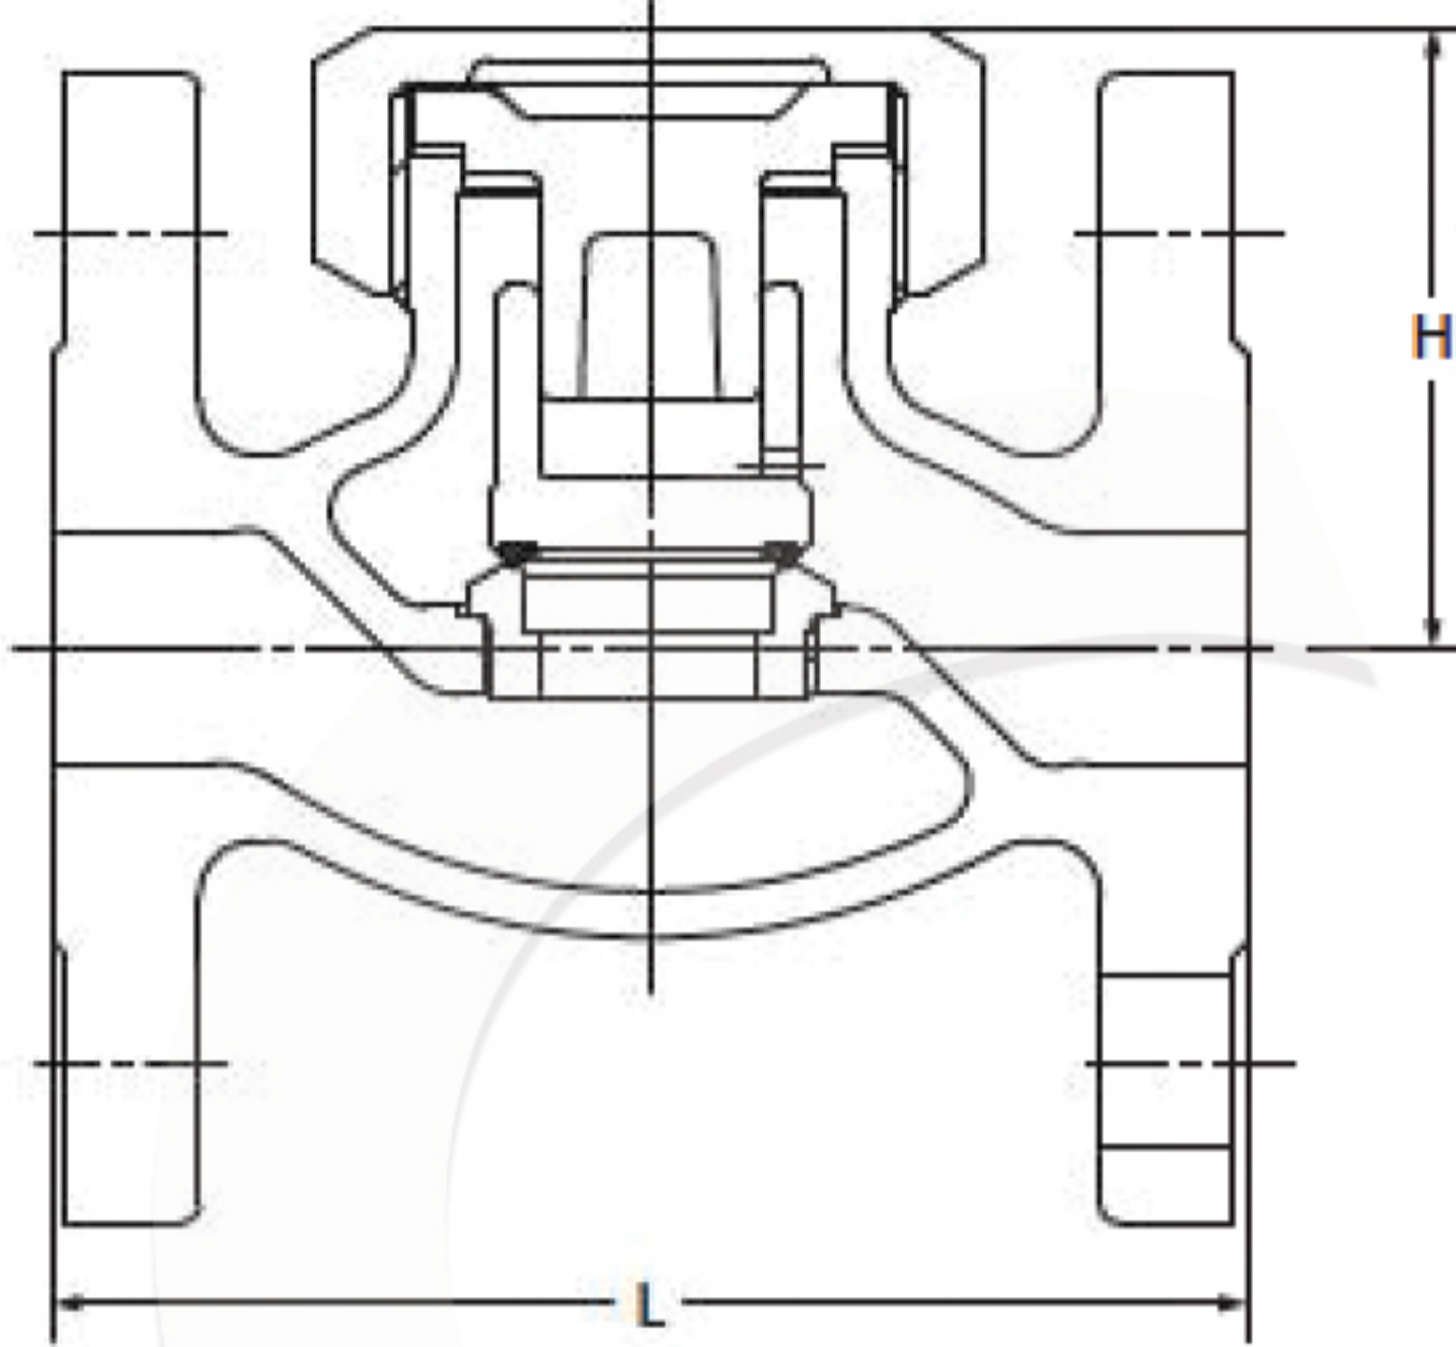

Face to face : JIS B 2002 JV 4-4  
End connection : JIS B 2239 20K

120°C Static water..... 2.8MPa  
220°C Steam, air, gas, oil..... 2.5MPa  
300°C Steam, air, gas, oil..... 2.3MPa  
350°C Steam, air, gas, oil..... 2.0MPa  
● Use for lubricating or hydraulic oil is acceptable.

**Materials**

Parts	JIS material
Body	FCD-S
Bonnet	SCS1
Disc	SCS13A + HF *
Bonnet ring	FCD-S
Gasket	Non-asbestos Sheet
Body seat ring	SCS13A + HF *

\* Hard-faced with Co-Cr-W alloy

**Dimensions**

Size	mm					
	15	20	25	32	40	50
	1/2	3/4	1	1 1/4	1 1/2	2
L	110	120	130	160	180	230
H	56	60	68	80	85	99

NOTE : For flange dimensions, refer to Page 44.