
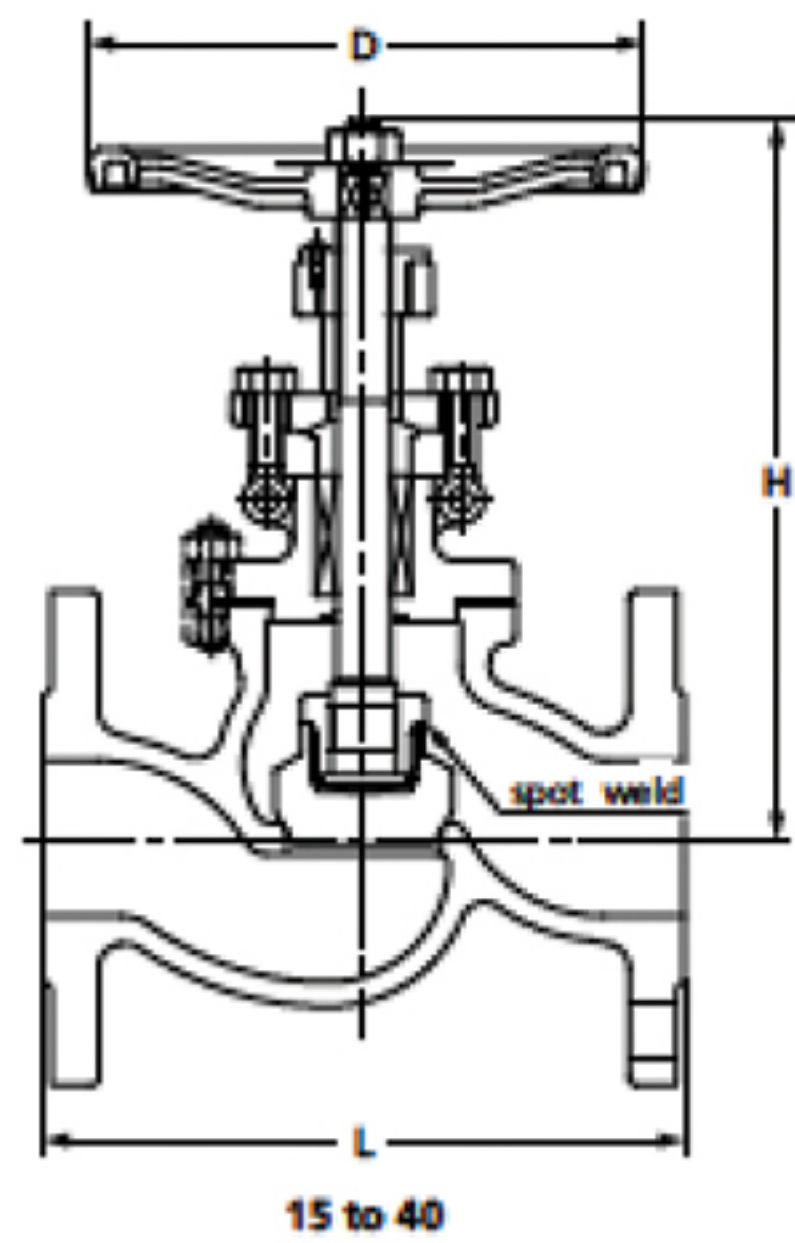
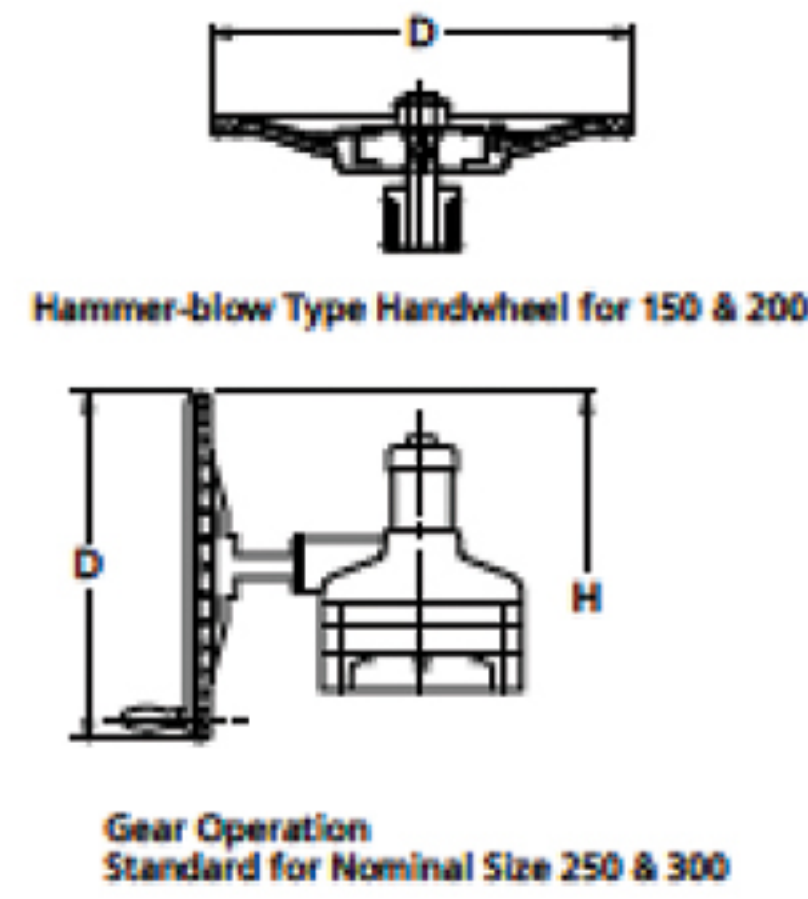


10K**GLOBE VALVE**


Pressure-Temperature Rating: JIS B2220

10UPAM(T)

15 to 40

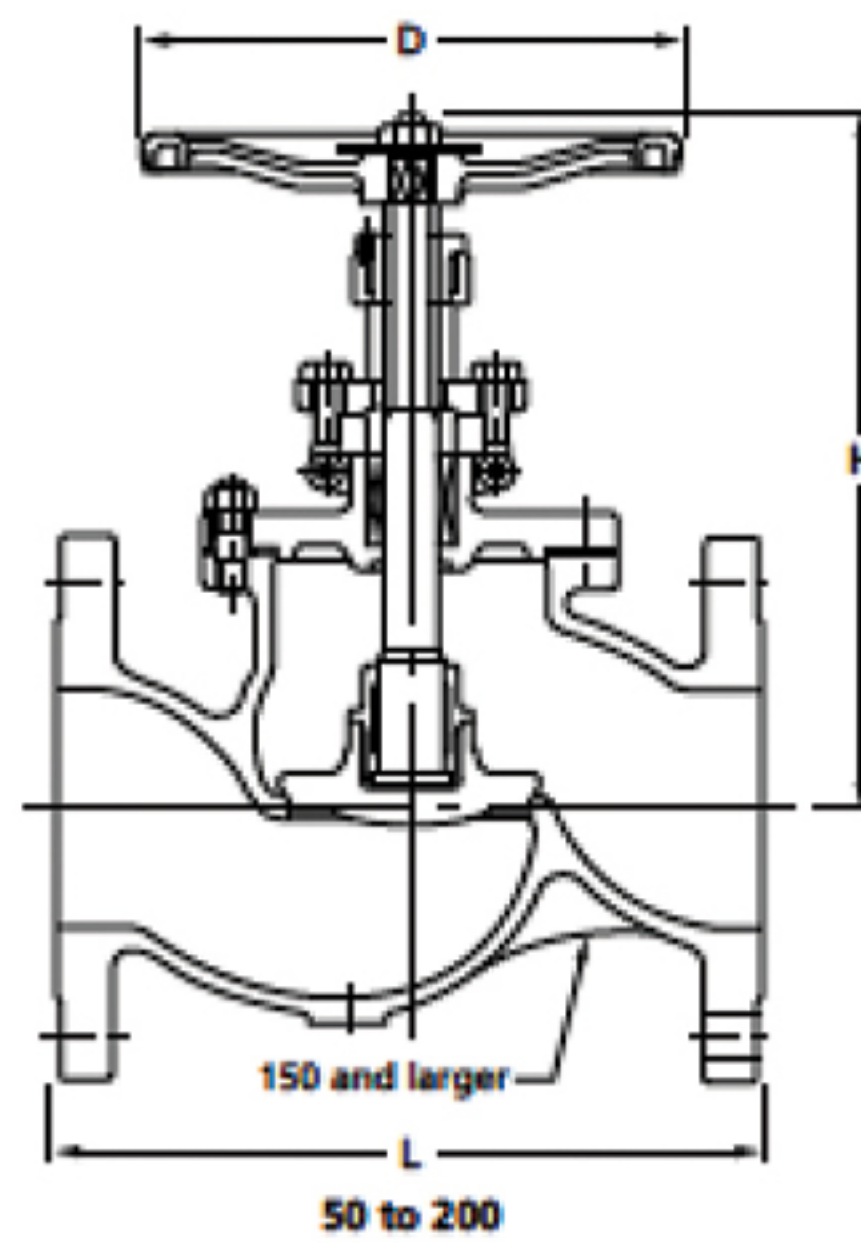

50 to 200

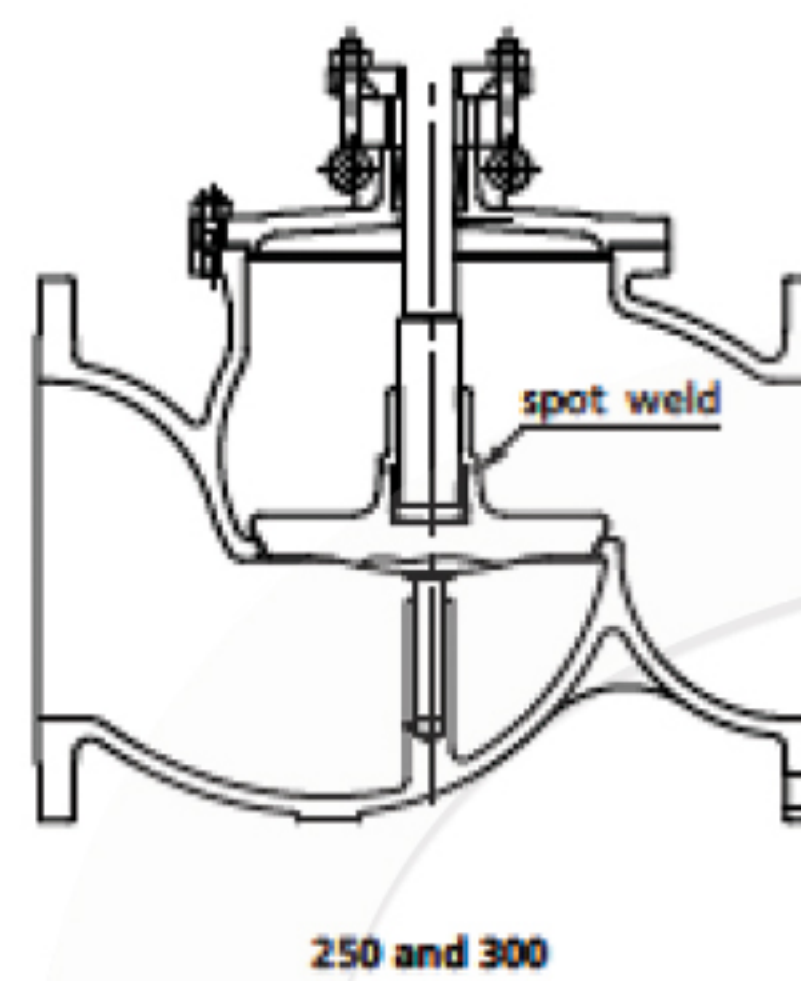

250 and 300

Materials

Parts	10UPA(T)*	10UPAM(T)*
Body	SCS13A	SCS14A
Bonnet	SCS13A	SCS14A
Stem	SUS304	SUS316
Disc	1/2 to 2 2 1/2 to 12	SUS304 SCS13A
Gland	SUS304	SUS316
Gland flange	SCS13A	
Gland packing	Refer to Page 10	
Gasket	Refer to Page 10	
Yoke bush	Ductile Ni-resist	
Handwheel	FCD400 -15	
Gland bolt/nut	SUS304/304	
Bonnet bolt/nut	SUS304/304	
Name plate	A1050P	

*(T) Suffixing stands for the provision of ceramic filled PTFE gaskets
 Note: Body seats and/or disc seats can be optionally hard-faced.
 Hammer-blow type handwheel for size 150 and 200

Items	
Face to face dimensions	ASME B16.10
End flange dimensions	JIS B2220
Wall thickness	ASME B16.34 Class 150

Nominal Size		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
		15	20	25	32	40	50	65	80	100	125	150	200	250	300
L	in.	4.25	4.61	5.00	5.51	6.50	7.99	8.50	9.49	11.5	14.0	16.0	19.5	24.5	27.5
	mm	108	117	127	140	165	203	216	241	292	356	406	495	622	698
H (open)	in.	6.54	6.61	6.81	7.52	7.99	9.21	9.72	11.5	12.8	15.0	17.8	21.9	36.3	39.9
	mm	166	168	173	191	203	234	247	292	324	381	452	556	923	1013
D	in.	3.54	3.54	3.94	4.72	5.51	6.30	7.09	7.87	8.86	9.84	13.8	15.8	19.7	19.7
	mm	90	90	100	120	140	160	180	200	225	250	350	400	500	500