


10K

LIFT CHECK VALVE

Pressure-Temperature Rating: JIS B2220

10UNA(T)

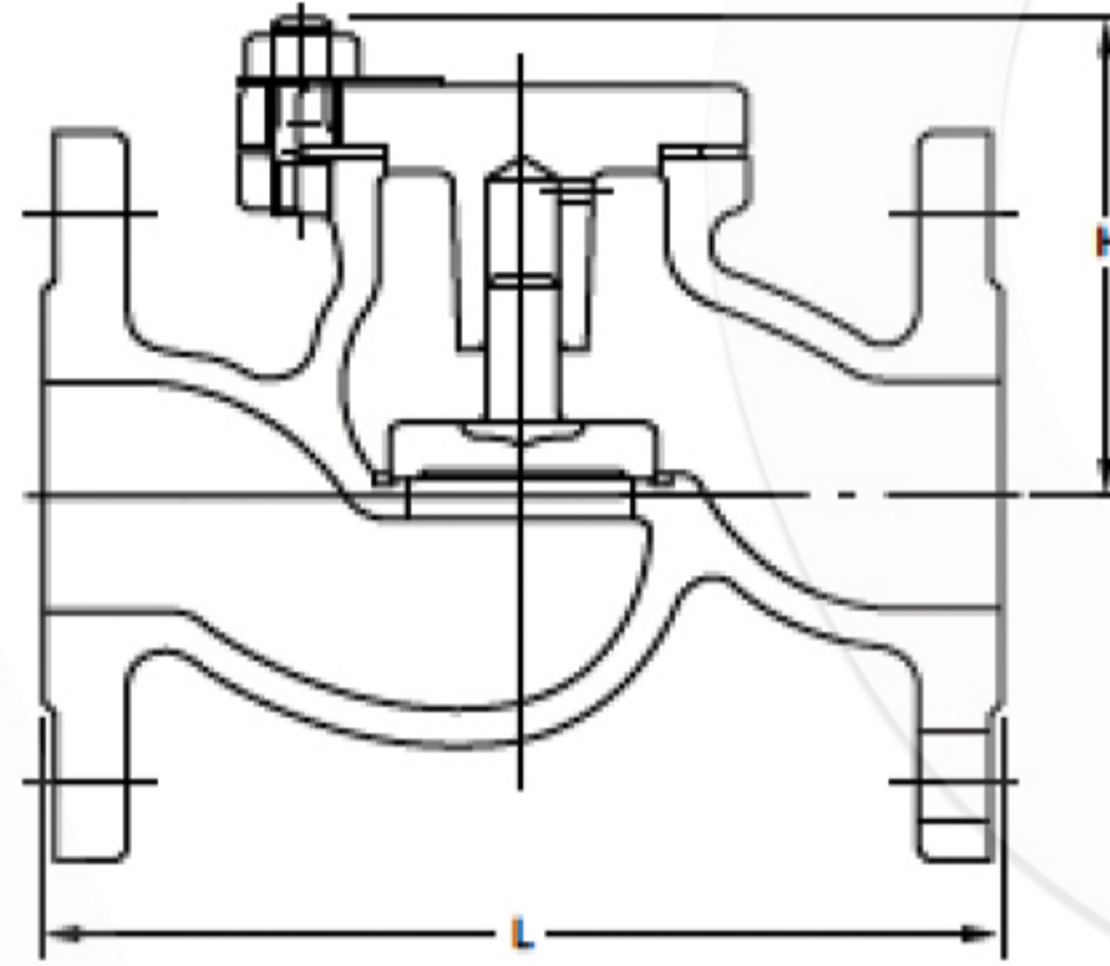

Materials

Parts	10UNA(T)*	10UNAM(T)*
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SUS304	SUS316
Gasket	Refer to Page 10	
Cover bolt/nut	SUS304/304	
Name plate	A1050P	

*(T) Suffixing stands for the provision of ceramic filled PTFE gaskets
 Note: Body seats and/or disc seats can be optionally hard-faced.

Items	
Face to face dimensions	ASME B16.10 Class 150
End flange dimensions	JIS B2220 10K
Wall thickness	ASME B16.34 Class 150

Nominal Size	1/2		3/4		1		1 1/4		1 1/2	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
L	in.	4.25	4.61	5.00	5.51	6.50				
	mm	108	117	127	140	165				
H	in.	2.91	2.99	2.99	3.31	3.39				
	mm	74	76	76	84	86				