


20K

LIFT CHECK VALVE

Pressure-Temperature Rating: JIS B2220

20UNAM

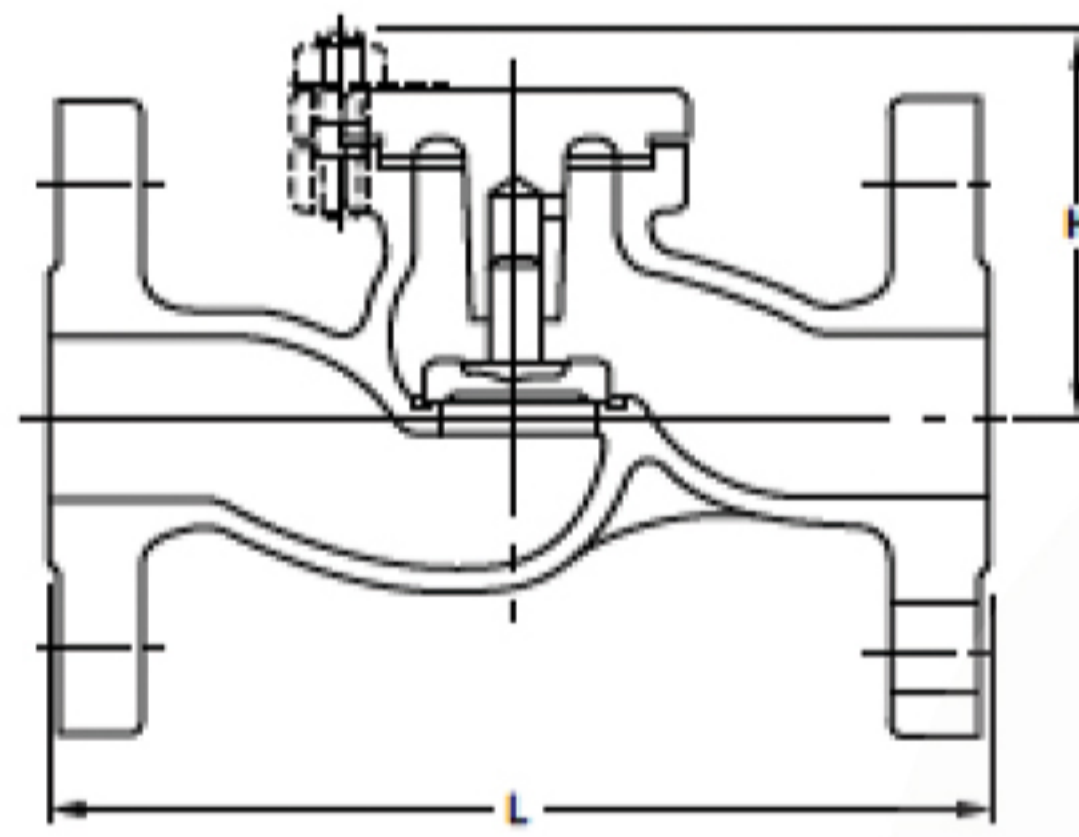

Materials

Parts	20UNA	20UNAM
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SUS304	SUS316
Gasket	Refer to Page 10	
Cover bolt/nut	SUS304/304	
Name plate	A1050P	

Note: Body seats and/or disc seats can be optionally hard-faced.

Items	
Face to face dimensions	ASME B16.10 Class 300
End flange dimensions	JIS B2220 20K
Wall thickness	ASME B16.34 Class 300

Nominal Size	1/2		3/4		1		1 1/2	
	in.	mm	in.	mm	in.	mm	in.	mm
L	in.	5.98	7.01	7.99	9.02			
	mm	152	178	203	229			
H	in.	3.15	3.07	3.11	3.82			
	mm	80	78	79	97			