


Class 300

SWING CHECK VALVE

Pressure-Temperature Rating: ASME B16.34

300UOAM

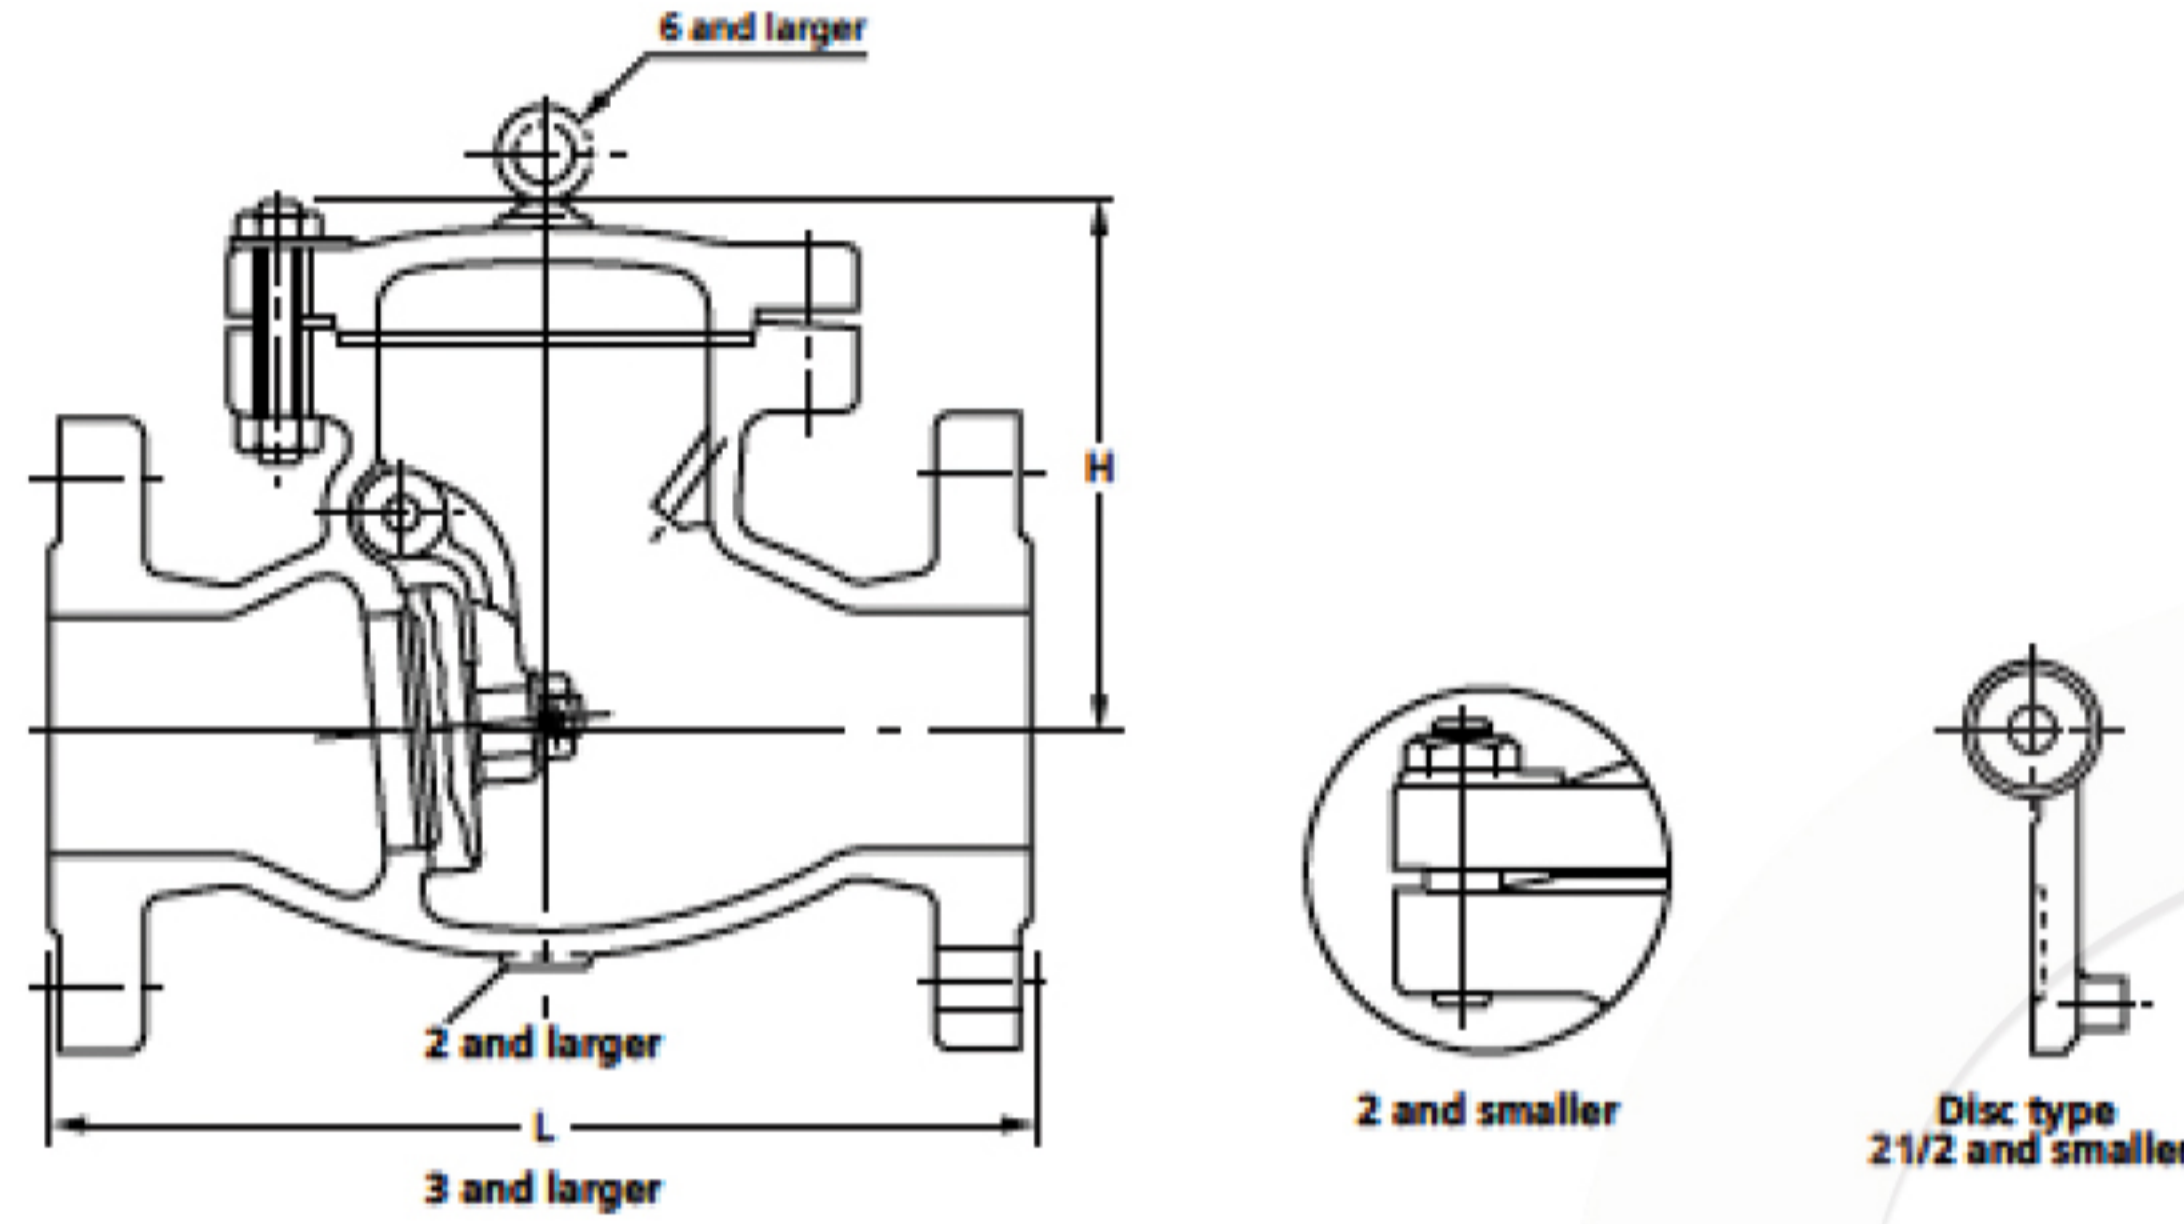

Materials

Parts	300UOA	300UOAM
Body	CF8	CF8M
Cover	CF8	CF8M
Disc	CF8	CF8M
Gasket	Refer to Page 10	
Disc nut*	304	316L
Hinge pin	304	316
Plug	304	316
Arm*	CF8	CF8M
Washer*	316, 316L (3 to 6)	
Cover bolt/nut	B8/8	
Split pin	316L	
Name plate	Aluminum	

*Size 3 and larger
Note: Body seats and/or disc seats can be optionally hard-faced.

Items	
Face to face dimensions	ASME B16.10 Class 300
End flange dimensions	ASME B16.5 Class 300
Wall thickness	ASME B16.34 Class 300

Nominal Size	1 1/2	2	2 1/2	3	4	5	6	8	10	12	
	40	50	65	80	100	125	150	200	250	300	
L	in.	9.49	10.5	11.5	12.5	14.0	15.8	17.5	21.0	24.5	28.0
	mm	241	267	292	318	356	400	444	533	622	711
H	in.	4.76	5.63	6.42	7.01	7.91	9.09	10.2	11.5	14.0	14.7
	mm	121	143	163	178	201	231	259	292	356	373