

20K CAST STAINLESS STEEL, BALL VALVES

KITZ Fig:20UTDZM

Sizes: 1/2-8inch(15-200mm)

Anti-static Device, Full Bore, Conform To Iso5211, Flanged Ends.

Standards


- End to End: ASME B16.10 CLASS 300
- End Connection: JIS B2220 20K (2)
- Wall Thickness: ASME B16.34 CLASS 300

Test Standard

- KITZ STANDARD

Dimensions

SIZE(inch/mm)	L	H	D1		
1/2	15	140.0	108.0	130.0	
3/4	20	152.0	111.0	130.0	
1	25	165.0	124.0	160.0	
1 1/4	32	178.0	128.0	160.0	
1 1/2	40	190.0	134.0	230.0	
2	50	216.0	143.0	230.0	
2 1/2	65	241.0	179.0	400.0	
3	80	283.0	189.0	400.0	
4	100	305.0	251.0	750.0	
5	125	381.0	267.0	750.0	
6	150	403.0	315.0	1000.0	
8	200	502.0	406.0	1500.0	

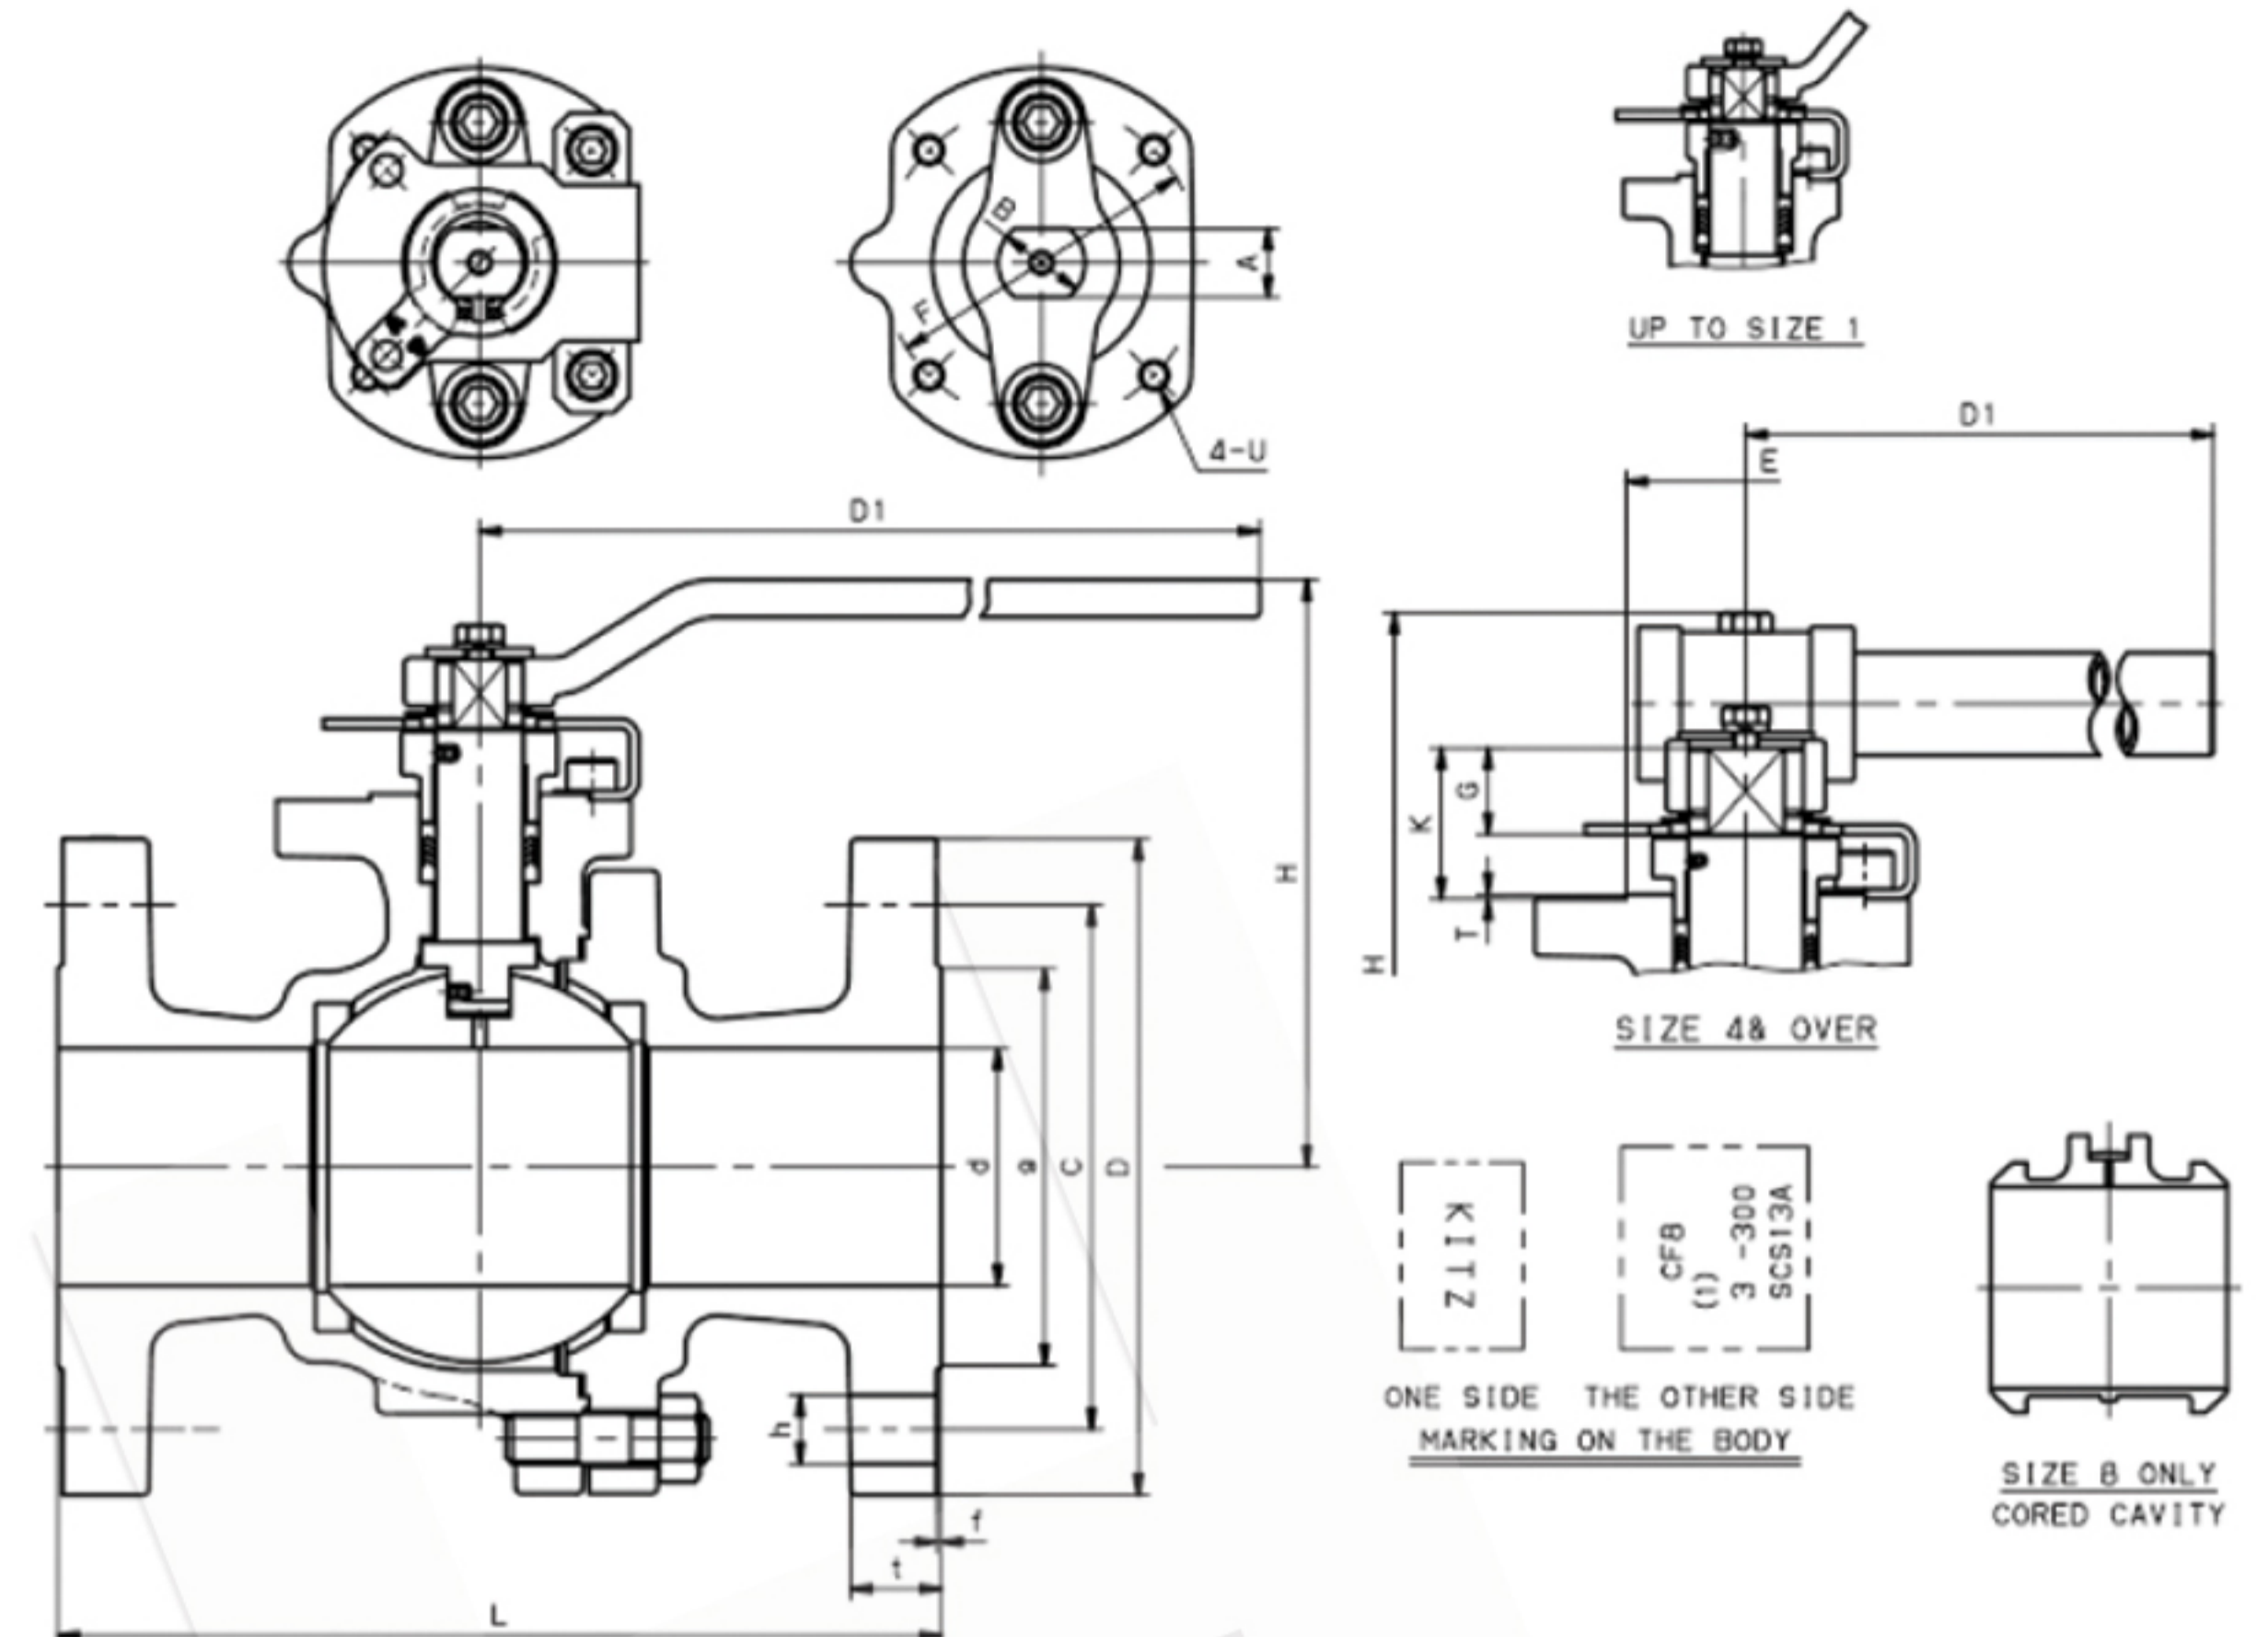

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	SCS14A
BODYCAP	STAINLESS STEEL	SCS14A
STEM	STAINLESS STEEL	SUS316
BALL	STAINLESS STEEL	SUS316 OR SCS14A

Specifications

20K CAST STAINLESS STEEL, BALL VALVES, Anti-static Device, Full Bore, Conform To Iso5211, Flanged Ends.

End to End: ASME B16.10 CLASS 300, End Connection: JIS B2220 20K (2), Wall Thickness: ASME B16.34 CLASS 300, Sizes: 1/2-8inch(15-200mm), BODY

MATERIAL: STAINLESS STEEL, BODYCAP MATERIAL: STAINLESS STEEL, STEM

MATERIAL: STAINLESS STEEL, BALL MATERIAL: STAINLESS STEEL, KITZ Fig:20UTDZM