


MODELS 7160P END CAP WITH PLUG

Shurjoint grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

Shurjoint standard fitting pressure ratings conform to the ratings of Model 7707 couplings.



Model 7160P

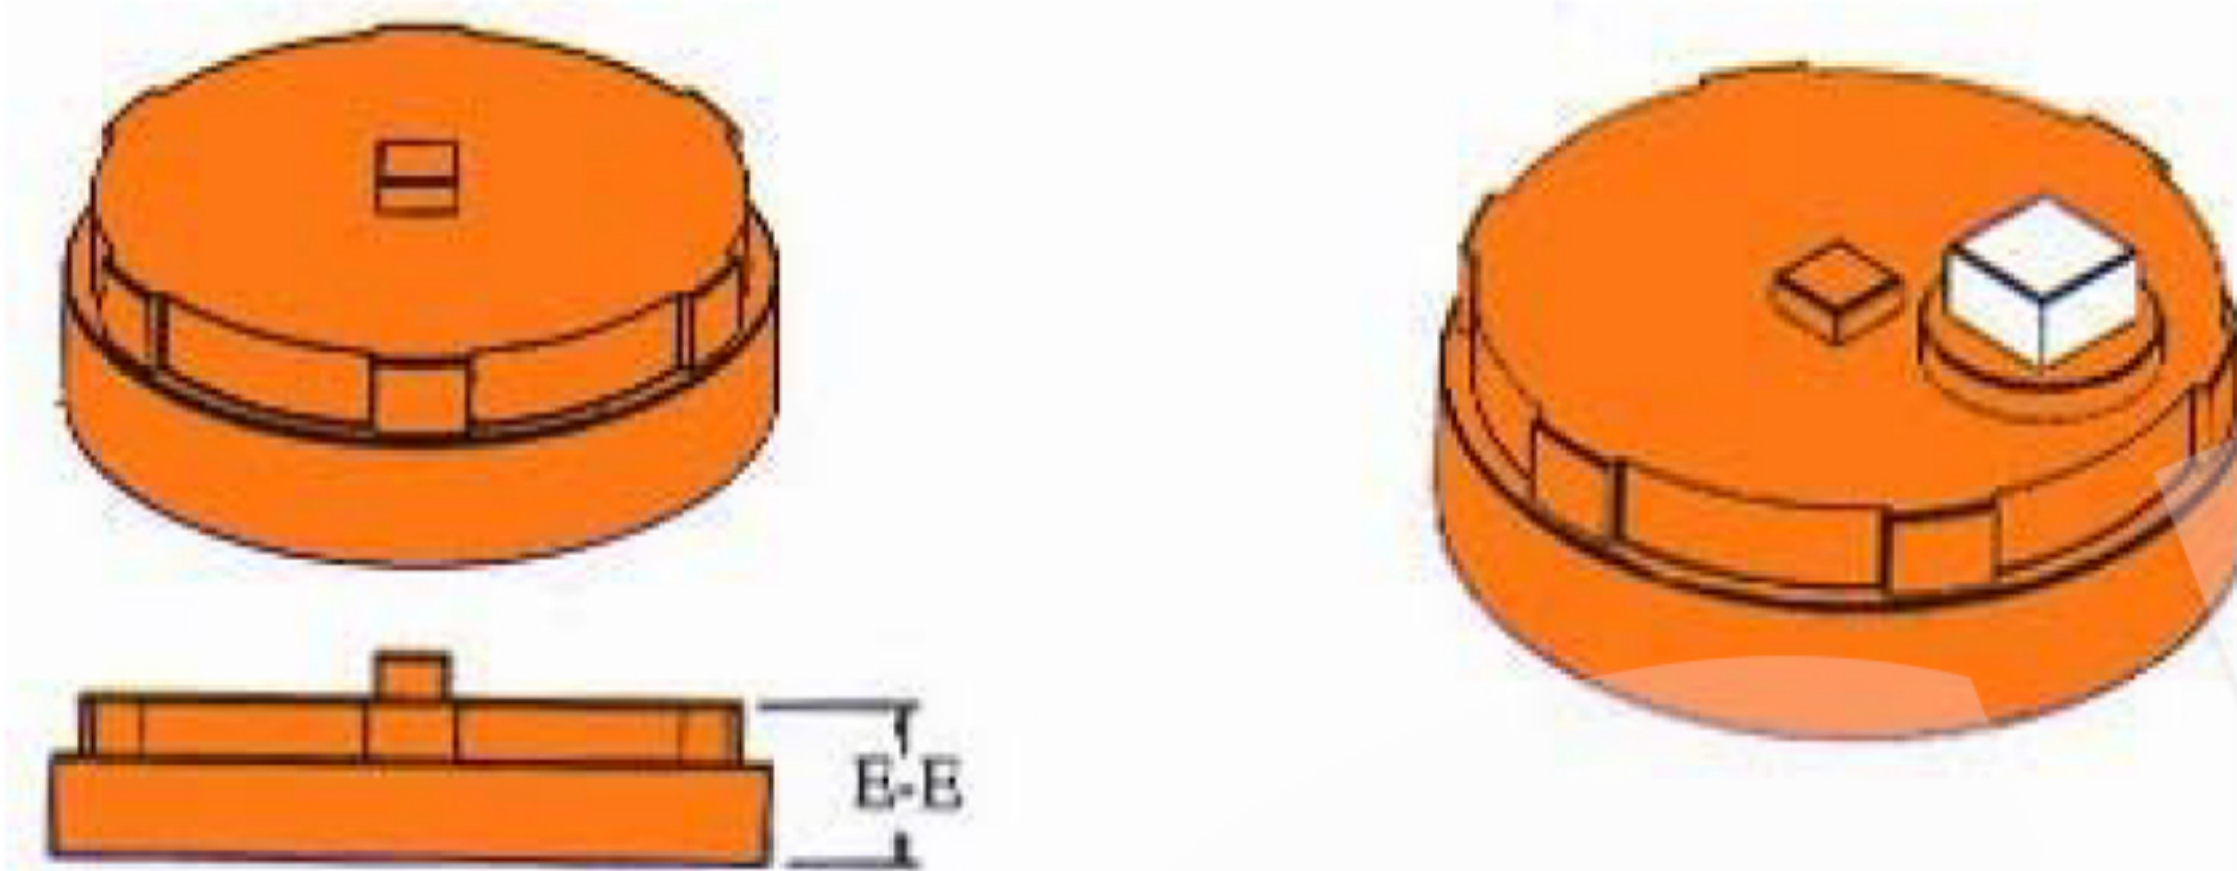

1"~12"

**10
YEAR
LIMITED
WARRANTY**

Full warranty terms can be found on www.shurjoint.com

Models 7160P End Cap with Plug			
Nominal Pipe Size	Pipe O.D.	7160 End Cap	
in mm	in mm	E-E in / mm	Lbs Kgs
1 25	1.315 33.4	0.87 22	0.2 0.1
1¼ 32	1.660 42.2	1.00 25	0.3 0.2
1½ 40	1.900 48.3	1.00 25	0.4 0.2
2 50	2.375 60.3	1.00 25	0.7 0.3
2½ 65	2.875 73.0	1.00 25	0.9 0.4
76.1 mm	3.000 76.1	1.00 25	0.9 0.4
3 80	3.500 88.9	1.00 25	1.5 0.7
108.0 mm	4.250 108.0	1.00 25	2.4 1.1
4 100	4.500 114.3	1.00 25	2.2 1.0
133.0 mm	5.250 133.0	1.00 25	3.7 1.7
139.7 mm	5.500 139.7	1.00 25	3.7 1.7
5 125	5.563 141.3	1.00 25	3.7 1.7

Models 7160P End Cap with Plug			
Nominal Pipe Size	Pipe O.D.	7160 End Cap	
in mm	in mm	E-E in / mm	Lbs Kgs
159.0 mm	6.250 159.0	1.00 25	5.1 2.3
165.1 mm	6.500 165.1	1.00 25	6.0 2.7
6 150	6.625 168.3	1.00 25	6.0 2.7
8 200	8.625 219.1	1.18 30	10.1 4.6
10 250	10.750 273.0	1.25 32	15.4 7.0
12 300	12.750 323.9	1.25 32	22.0 10.0
200 JIS	8.516 216.3	1.18 30	10.1 4.6
250 JIS	10.528 267.4	1.25 32	15.4 7.0
300 JIS	12.539 318.5	1.25 32	22.0 10.0